

# WIPC409HD Firmware Upgrade Instructions:

System Firmware Version: V6.4.4.1.1-20140808 (old) to **V6.4.4.1.1-20140924 (new)**  
Web UI Firmware Version: V0.34.0.9 (old) to **V0.34.1.0 (new)**

## **Fixes below:**

### **System firmware: V6.4.4.1.1-20140924**


- This version changed default audio type to **G.726** able to support audio if we click Speak and Listen Function using the Mobile App.

### **Web-UI: V0.34.1.0.pkg**

- Device ID & Manufacture's DDNS is the same as the one printed in the LABEL STICKER, whether camera is using Wired or Wireless Connection Type

## **How to Upgrade the Firmware?**

1. On your computer, download and save the latest Firmware Version from Aztech Support Website. Unzip the file to open contents.
2. Ensure that you save the Firmware File. (Filename below)  
[\(B18EN\\_V6.4.4.1.1-20140924 v0.34.1.0 \(Aztech\).pkg\)](#)
3. After saving the file, open and launch the WIPC409HD Utility.  
WIPC409HD Utility is included in the CD provided or maybe downloaded at Aztech website. Click Find, select the IP Camera and click open (internal access) to go to the IP Camera's Web User Interface Page.

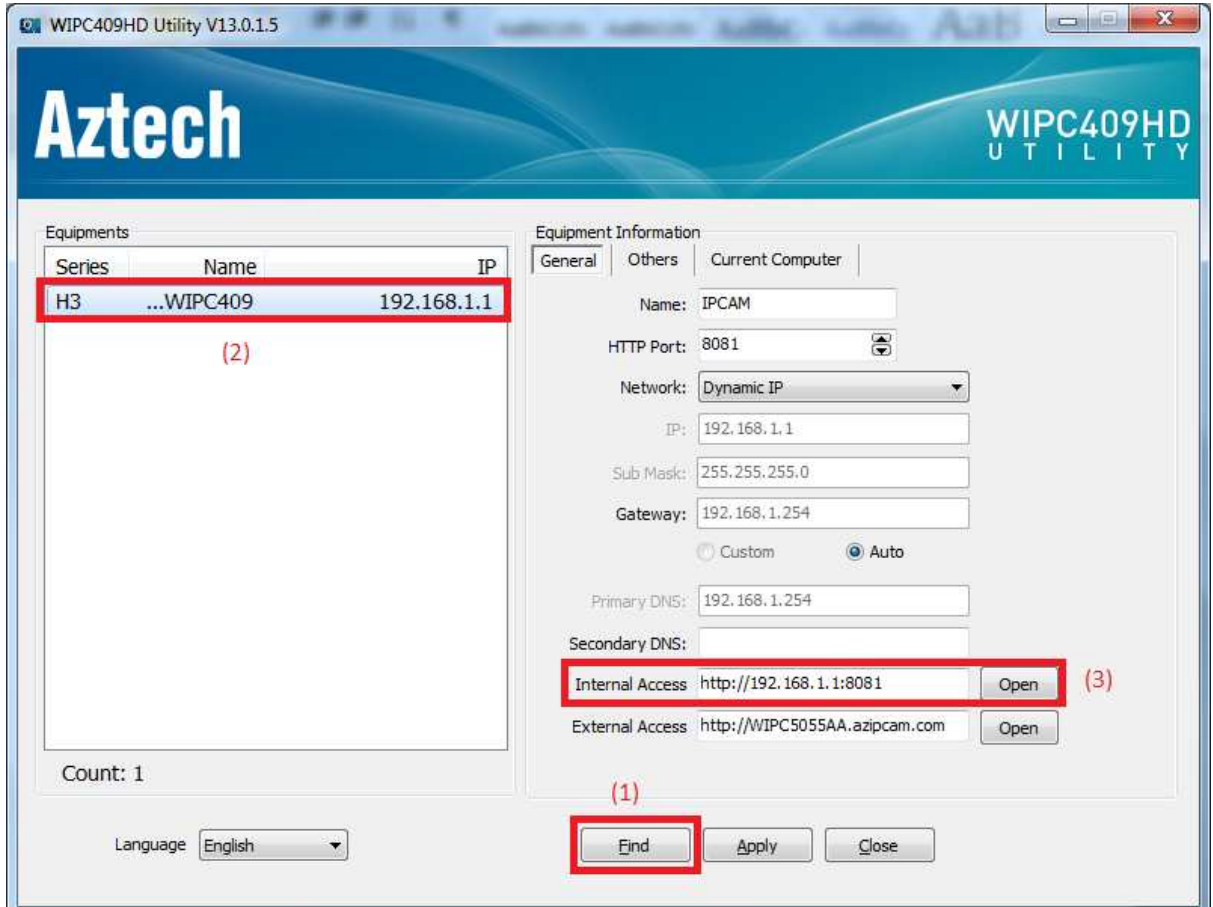


4. On your Web Browser, enter the Username and Password of the IP Camera, click OK. Then click Sign-in. (by default Username and Password is 'admin')





5. After Sign in to Web Browser, go to System Menu and at the right column, go to Initialize Tab.
6. Below, you will find "Firmware Upgrade" Click Browse and select the file from your computer, Click confirm to start the upgrade.

Filename: **B18EN\_V6.4.4.1.1-20140924 v0.34.1.0 (Aztech).pkg** – then confirm.

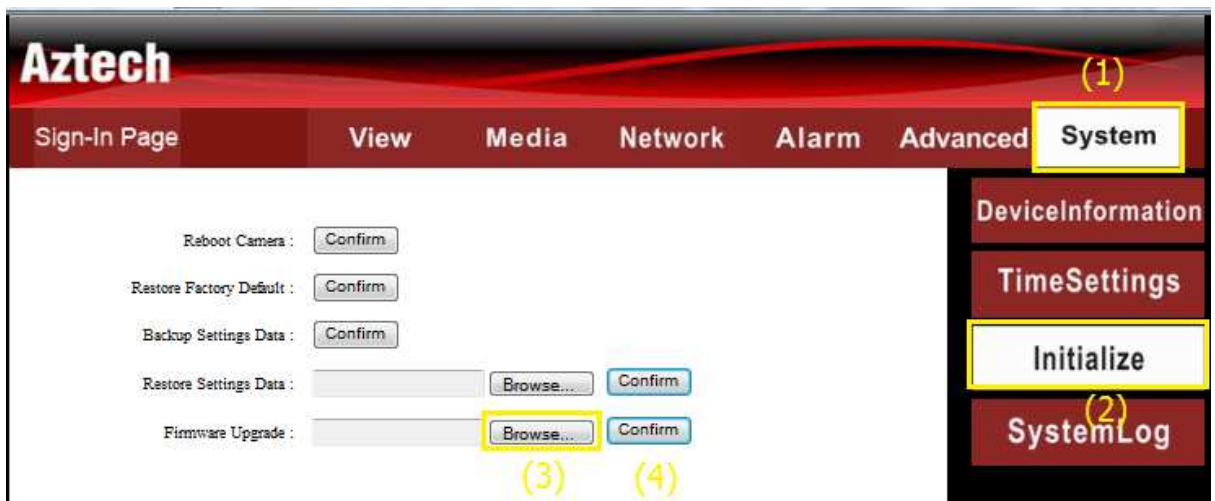


7. Firmware Upgrade will be in progress, click OK after completed.

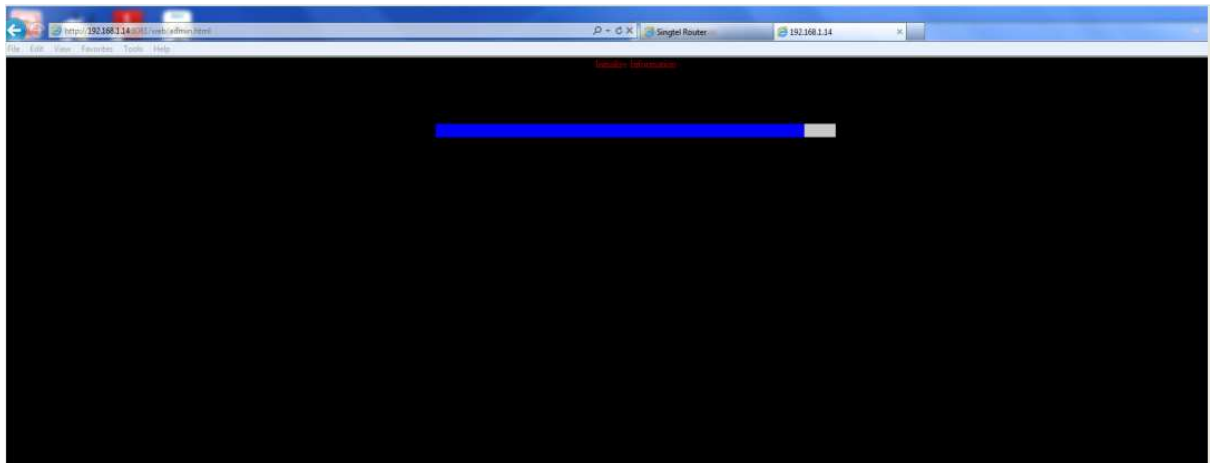

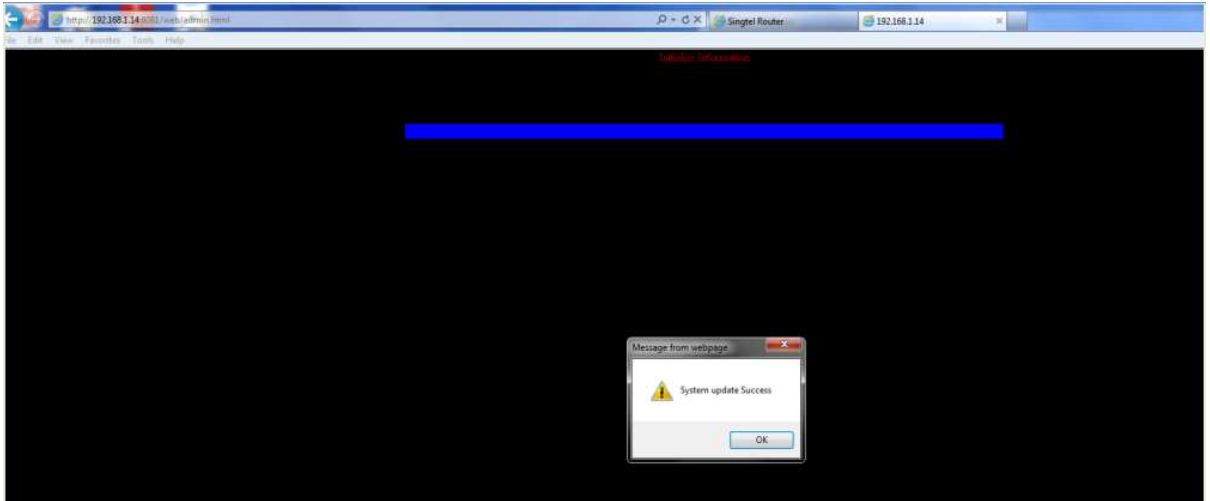

8. To confirm if upgrade is successful, on System Menu and Device Information Tab, it must display below Device Information.

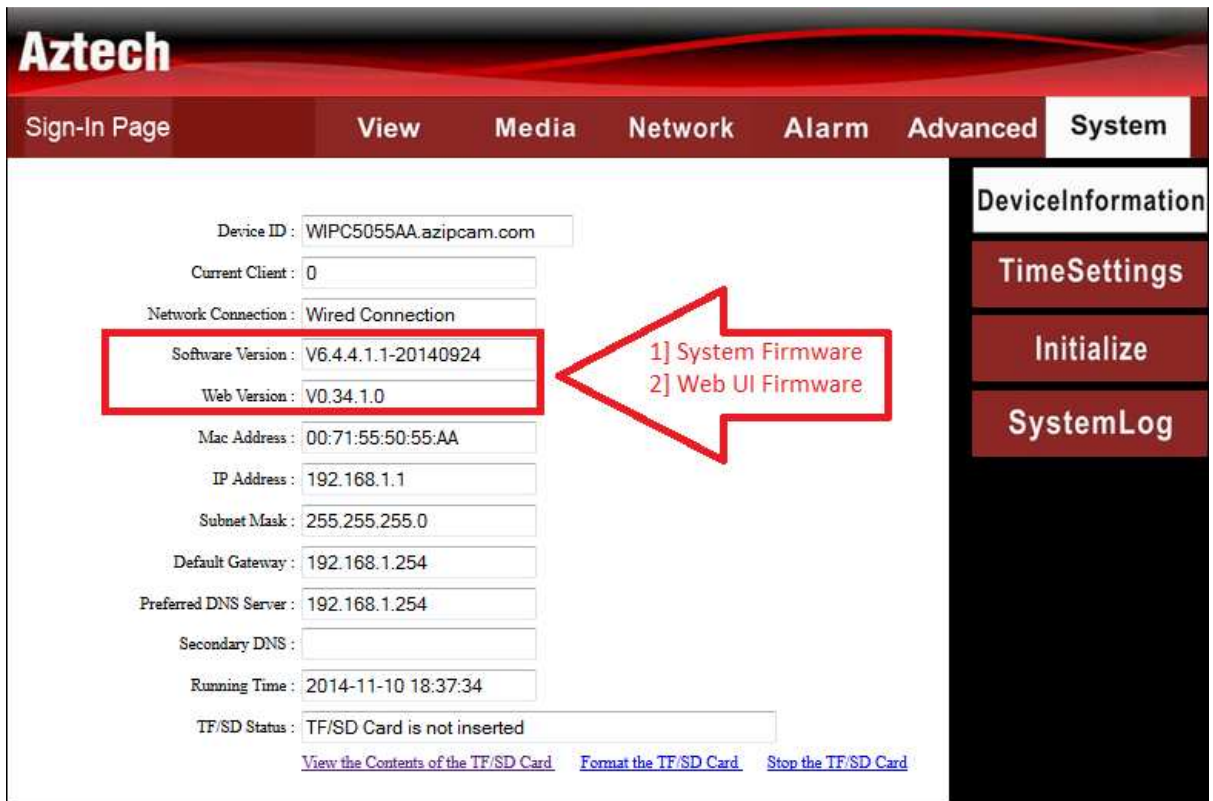

System Firmware Version: V6.4.4.1.1-20140924 (new)

Web UI Firmware Version: V0.34.1.0 (new)