



## EOC-5610

Wireless 802.11 a/b/g Outdoor AP

2.4 GHz / 5 GHz	54Mbps	802.11 a/b/g	24V PoE
--------------------	--------	--------------	---------

EOC-5610 is a long range outdoor wireless Access Point / Client Bridge that operates in both **5GHz and 2.4GHz** frequency. It provides high bandwidth up to 54Mbps and features high transmitted output power as well as superior sensitivity. EOC-5610 extends radio coverage, avoids unnecessary roaming between Access Points and ensures a stable wireless connection while reduces the number of required equipments.

EOC-5610 provides user friendly interface including user friendly distance control ranges from 1KM up to 30KM and RSSI LED indicator offering real time signal status. It comes with PoE injector for convenient outdoor installation.

EOC-5610 enforces transmission security with full support of latest encryption mechanism including 64/128-bit WEP, WPA and WPA2. With 13dBi internal antenna and superior performance, EOC-5610 makes an optimal wireless solution for both small and large scale projects.



### Package Content

- 1\* Wireless 802.11a/b/g Outdoor Device(EOC-5610)
- 1\* PoE Injector (EPE-1212)
- 1\* Power Adaptor(24V/1A)
- 1\* CD with User's Manual
- 1\* QIG
- 1\* Metal strap
- 2\* Special screw set

\* Theoretical wireless signal rate based on IEEE standard of 802.11b, g chipset used. Actual throughput may vary. Network conditions and environmental factors lower actual throughput rate.

\*\* All specifications are subject to change without notice.

7/22/2009

EnGenius Networks Singapore Pte Ltd

215 Henderson Road #01-04 Henderson Industrial Park Singapore 159554

Tel: +65-62271088 Fax: +65-62272766

Website: [www.engeniustech.com.sg](http://www.engeniustech.com.sg) Email: [inquiry@engeniustech.com.sg](mailto:inquiry@engeniustech.com.sg)





# EOC-5610

## Wireless 802.11 a/b/g Outdoor AP

2.4 GHz / 5 GHz	54Mbps	802.11 a/b/g	24V PoE
-----------------	--------	--------------	---------

## Features

### Wireless

- **5GHz / 2.4GHz** It works in 5GHz / 2.4GHz frequency spectrum
- **High output power** Transmit output power programmable for different country selections
- **High Data Rate** High speed transmitting rate up to 54Mbps, supports large payload such as MPEG video streaming
- **Multifunction application** Access Point/Client Bridge/Client Router
- **Long range transmitting** Transmit power control and distance control (ACK timeout)
- **Signal Strength Display** LED indicators have the best transmit and receive signal for traffic communication. And RF signal strength status shown LEDs of 3 colors, making network build-up easier
- **Public wireless solution** An AP interface that is especially useful in public areas such as hotspots and enterprise
- **QoS(WMM)** Enhance performance and density

### Networking

- **PPPoE** Point-to-Point Protocol over Ethernet at Client Router mode. This function will keep trying when failed or disconnected
- **VPN Pass Through**

### Security

- **802.11i** WEP, WPA, WPA2 (Encryption support TKIP/AES)
- **MAC address functions** MAC address filter (AP mode)
- **802.1x** IEEE802.1x Authenticator
- **Station isolation**

### Management

- **Firmware Upgrade** Upgrading firmware via web browser, setting are reserved after upgrade
- **Reset & Backup** Reset to factory default. User can export all setting into a file via WEB
- **MIB** MIB I, MIB II(RFC1213)
- **SNMP** V1, V2c

\* Theoretical wireless signal rate based on IEEE standard of 802.11b, g chipset used. Actual throughput may vary. Network conditions and environmental factors lower actual throughput rate.

\*\* All specifications are subject to change without notice.

7/22/2009

EnGenius Networks Singapore Pte Ltd  
215 Henderson Road #01-04 Henderson Industrial Park Singapore 159554  
Tel: +65-62271088 Fax: +65-62272766  
Website: [www.engeniustech.com.sg](http://www.engeniustech.com.sg) Email: [inquiry@engeniustech.com.sg](mailto:inquiry@engeniustech.com.sg)





# EOC-5610

## Wireless 802.11 a/b/g Outdoor AP

2.4 GHz / 5 GHz	54Mbps	802.11 a/b/g	24V PoE
-----------------	--------	--------------	---------

### Technical Specifications

Hardware Specification	
MCU/RF	Atheros AR2313+AR5112
Memory	32MB SDRAM
Flash	8MB
Physical Interface	1 x 10/100 Fast Ethernet RJ-45 1 x Reset Button 1 x Antenna Switch ( Internal and External Switch ) 2 x SMA Connector ( One is for 2.4GHz and another is for 5GHz )
LED indicators	Power/ Status LAN (10/100Mbps) WLAN (Wireless is up) 3 x Link Quality (Client Bridge mode) <ul style="list-style-type: none"> <li>• Green: Good Quality</li> <li>• Yellow: Marginally Acceptable Quality</li> <li>• Red: Bad Quality</li> </ul>
Power Requirements	Active Ethernet (Power over Ethernet) Proprietary PoE design Power Adapter 24V / 1A DC
Regulation Certifications	FCC Part 15C/15B/15E, EN301 893, EN 300 328, EN 301 489-1/-17, EN60950, IC Certification

RF Specification			
Frequency Band	<b>802.11a</b> = 5.150~5.350GHz, 5.470~5.725GHz, 5.725~5.825GHz <b>802.11b/g</b> = 2.412~2.472GHz		
Modulation Technology	OFDM = BPSK, QPSK, 16-QAM, 64-QAM DSSS = DBPSK, DQPSK, CCK		
Operating Channels	<b>802.11a</b> = See the Table1 <b>802.11b/g</b> = 11 for North America, 14 for Japan, 13 for Europe		
Receive Sensitivity (Typical)	<b>802.11a</b> -92dBm @ 6Mbps, -73dBm @ 54Mbps	<b>802.11g</b> -92 dBm @ 6Mbps, -75 dBm @ 54Mbps	<b>802.11b</b> -97 dBm @ 1Mbps -91 dBm @ 11Mbps

\* Theoretical wireless signal rate based on IEEE standard of 802.11b, g chipset used. Actual throughput may vary. Network conditions and environmental factors lower actual throughput rate.

\*\* All specifications are subject to change without notice.

7/22/2009

EnGenius Networks Singapore Pte Ltd  
215 Henderson Road #01-04 Henderson Industrial Park Singapore 159554  
Tel: +65-62271088 Fax: +65-62272766  
Website: [www.engeniustech.com.sg](http://www.engeniustech.com.sg) Email: [inquiry@engeniustech.com.sg](mailto:inquiry@engeniustech.com.sg)





# EOC-5610

## Wireless 802.11 a/b/g Outdoor AP

2.4 GHz / 5 GHz	54Mbps	802.11 a/b/g	24V PoE
-----------------	--------	--------------	---------

Available transmit power (Average power)	<table border="1"> <thead> <tr> <th colspan="2">FCC</th> <th colspan="2">ETSI</th> </tr> <tr> <th>Frequency</th> <th>Power</th> <th>Frequency</th> <th>Power</th> </tr> </thead> <tbody> <tr> <td>5.150~5.350 GHz <b>IEEE802.11a</b></td> <td>26dBm@6~24Mbps 24dBm@36Mbps 22dBm@48Mbps 20dBm@54Mbps</td> <td>5.150~5.350 GHz <b>IEEE802.11a</b></td> <td>26dBm@6~24Mbps 24dBm@36Mbps 22dBm@48Mbps 20dBm@54Mbps</td> </tr> <tr> <td>5.470~5.725 GHz <b>IEEE802.11a</b></td> <td>26dBm@6~24Mbps 24dBm@36Mbps 22dBm@48Mbps 20dBm@54Mbps</td> <td>5.470~5.725 GHz <b>IEEE802.11a</b></td> <td>26dBm@6~24Mbps 24dBm@36Mbps 22dBm@48Mbps 20dBm@54Mbps</td> </tr> <tr> <td>5.725~5.825 GHz <b>IEEE802.11a</b></td> <td>26dBm@6~24Mbps 24dBm@36Mbps 22dBm@48Mbps 20dBm@54Mbps</td> <td>5.725~5.825 GHz <b>IEEE802.11a</b></td> <td>26dBm@6~24Mbps 24dBm@36Mbps 22dBm@48Mbps 20dBm@54Mbps</td> </tr> <tr> <td>2.412~2.462 GHz <b>IEEE802.11g</b></td> <td>26dBm@6~24Mbps 24dBm@36Mbps 23dBm@48Mbps 22dBm@54Mbps</td> <td>2.412~2.472 GHz <b>IEEE802.11g</b></td> <td>26dBm@6~24Mbps 24dBm@36Mbps 23dBm@48Mbps 22dBm@54Mbps</td> </tr> <tr> <td>2.412~2.462 GHz <b>IEEE802.11b</b></td> <td>27dBm@1~11Mbps</td> <td>2.412~2.472 GHz <b>IEEE802.11b</b></td> <td>27dBm@1~11Mbps</td> </tr> </tbody> </table>				FCC		ETSI		Frequency	Power	Frequency	Power	5.150~5.350 GHz <b>IEEE802.11a</b>	26dBm@6~24Mbps 24dBm@36Mbps 22dBm@48Mbps 20dBm@54Mbps	5.150~5.350 GHz <b>IEEE802.11a</b>	26dBm@6~24Mbps 24dBm@36Mbps 22dBm@48Mbps 20dBm@54Mbps	5.470~5.725 GHz <b>IEEE802.11a</b>	26dBm@6~24Mbps 24dBm@36Mbps 22dBm@48Mbps 20dBm@54Mbps	5.470~5.725 GHz <b>IEEE802.11a</b>	26dBm@6~24Mbps 24dBm@36Mbps 22dBm@48Mbps 20dBm@54Mbps	5.725~5.825 GHz <b>IEEE802.11a</b>	26dBm@6~24Mbps 24dBm@36Mbps 22dBm@48Mbps 20dBm@54Mbps	5.725~5.825 GHz <b>IEEE802.11a</b>	26dBm@6~24Mbps 24dBm@36Mbps 22dBm@48Mbps 20dBm@54Mbps	2.412~2.462 GHz <b>IEEE802.11g</b>	26dBm@6~24Mbps 24dBm@36Mbps 23dBm@48Mbps 22dBm@54Mbps	2.412~2.472 GHz <b>IEEE802.11g</b>	26dBm@6~24Mbps 24dBm@36Mbps 23dBm@48Mbps 22dBm@54Mbps	2.412~2.462 GHz <b>IEEE802.11b</b>	27dBm@1~11Mbps	2.412~2.472 GHz <b>IEEE802.11b</b>	27dBm@1~11Mbps
	FCC		ETSI																													
	Frequency	Power	Frequency	Power																												
	5.150~5.350 GHz <b>IEEE802.11a</b>	26dBm@6~24Mbps 24dBm@36Mbps 22dBm@48Mbps 20dBm@54Mbps	5.150~5.350 GHz <b>IEEE802.11a</b>	26dBm@6~24Mbps 24dBm@36Mbps 22dBm@48Mbps 20dBm@54Mbps																												
	5.470~5.725 GHz <b>IEEE802.11a</b>	26dBm@6~24Mbps 24dBm@36Mbps 22dBm@48Mbps 20dBm@54Mbps	5.470~5.725 GHz <b>IEEE802.11a</b>	26dBm@6~24Mbps 24dBm@36Mbps 22dBm@48Mbps 20dBm@54Mbps																												
	5.725~5.825 GHz <b>IEEE802.11a</b>	26dBm@6~24Mbps 24dBm@36Mbps 22dBm@48Mbps 20dBm@54Mbps	5.725~5.825 GHz <b>IEEE802.11a</b>	26dBm@6~24Mbps 24dBm@36Mbps 22dBm@48Mbps 20dBm@54Mbps																												
	2.412~2.462 GHz <b>IEEE802.11g</b>	26dBm@6~24Mbps 24dBm@36Mbps 23dBm@48Mbps 22dBm@54Mbps	2.412~2.472 GHz <b>IEEE802.11g</b>	26dBm@6~24Mbps 24dBm@36Mbps 23dBm@48Mbps 22dBm@54Mbps																												
2.412~2.462 GHz <b>IEEE802.11b</b>	27dBm@1~11Mbps	2.412~2.472 GHz <b>IEEE802.11b</b>	27dBm@1~11Mbps																													
Internal Antenna	<b>Antenna Specification</b>																															
	<b>Gain</b>	<b>5dBi</b>	<b>13dBi</b>																													
	<b>Radiation</b>	<b>Directional</b>	<b>Directional</b>																													
	<b>Frequency Band Range</b>	<b>2.4-2.5GHz</b>	<b>5.1-5.8GHz</b>																													
	<b>Horizontal -3dB Bandwidth</b>	<b>40°</b>	<b>42°</b>																													
	<b>Vertical -3dB Bandwidth</b>	<b>40°</b>	<b>21°</b>																													

\* Theoretical wireless signal rate based on IEEE standard of 802.11b, g chipset used. Actual throughput may vary. Network conditions and environmental factors lower actual throughput rate.

\*\* All specifications are subject to change without notice.

7/22/2009

EnGenius Networks Singapore Pte Ltd  
 215 Henderson Road #01-04 Henderson Industrial Park Singapore 159554  
 Tel: +65-62271088 Fax: +65-62272766  
 Website: [www.engenustech.com.sg](http://www.engenustech.com.sg) Email: [inquiry@engenustech.com.sg](mailto:inquiry@engenustech.com.sg)





# EOC-5610

Wireless 802.11 a/b/g Outdoor AP

2.4 GHz / 5 GHz	54Mbps	802.11 a/b/g	24V PoE
-----------------	--------	--------------	---------

Internal Antenna Pattern	
External Antenna	2 x SMA connector (for 2.4GHz and 5GHz individually)

Software Features	
General	
Topology	Infrastructure
Protocol / Standard	IEEE 802.3 (Ethernet) IEEE 802.3u (Fast Ethernet) IEEE 802.11b/g (2.4GHz WLAN)
Operation Mode	<b>802.11 a/b/g</b> Access Point Client Bridge Client Router
LAN	DHCP Server DHCP Client

\* Theoretical wireless signal rate based on IEEE standard of 802.11b, g chipset used. Actual throughput may vary. Network conditions and environmental factors lower actual throughput rate.

\*\* All specifications are subject to change without notice.

7/22/2009

EnGenius Networks Singapore Pte Ltd  
 215 Henderson Road #01-04 Henderson Industrial Park Singapore 159554  
 Tel: +65-62271088 Fax: +65-62272766  
 Website: [www.engeniustech.com.sg](http://www.engeniustech.com.sg) Email: [inquiry@engeniustech.com.sg](mailto:inquiry@engeniustech.com.sg)





# EOC-5610

## Wireless 802.11 a/b/g Outdoor AP

2.4 GHz / 5 GHz	54Mbps	802.11 a/b/g	24V PoE
-----------------	--------	--------------	---------

VPN	VPN Pass through
Wireless	Channel Selection (Setting varies by countries) Transmission Rate 11 a/b/g : 54, 48, 36, 24, 18, 12, 11, 9, 6, 5.5, 2, 1 Mbps Long distance transmission : 1km to 30km (Ack timeout) Transmit power table Signal Strength indication using LEDs PPPoE ( CR mode ) Multiple SSID/VLAN
Security	WEP Encryption-64/128/152 bit WPA/WPA2 Personal (WPA-PSK using TKIP or AES) WPA/WPA2 Enterprise (WPA-EAP using TKIP) 802.1x Authenticator Hide SSID in beacons MAC address filtering, up to 50 field Wireless STA (Client) connected list
QoS	WMM
Management	
Configuration	Web-based configuration (HTTP)
Firmware Upgrade	- Upgrade firmware via web-browser - Keep latest setting when f/w update
Administrator Setting	Administrator password change
Reset Setting	- Reboot (Press 1 second) - Reset to Factory Default (Press 5 seconds)
System monitoring	Status, Event Log
SNMP	V1, V2c
MIB	MIB I, MIB II (RFC1213)
Backup & Restore	Settings through Web
Time setting	NTP (Auto-setting of time) Time setting manually

\* Theoretical wireless signal rate based on IEEE standard of 802.11b, g chipset used. Actual throughput may vary. Network conditions and environmental factors lower actual throughput rate.

\*\* All specifications are subject to change without notice.

7/22/2009

EnGenius Networks Singapore Pte Ltd  
 215 Henderson Road #01-04 Henderson Industrial Park Singapore 159554  
 Tel: +65-62271088 Fax: +65-62272766  
 Website: [www.engeniustech.com.sg](http://www.engeniustech.com.sg) Email: [inquiry@engeniustech.com.sg](mailto:inquiry@engeniustech.com.sg)





# EOC-5610

## Wireless 802.11 a/b/g Outdoor AP

2.4 GHz / 5 GHz	54Mbps	802.11 a/b/g	24V PoE
-----------------	--------	--------------	---------

### Environment & Mechanical

Temperature Range	Operating -20°C~70°C Storage -30°C to 80°C
Humidity (non-condensing)	0% ~ 95% typical
Dimensions	260mm (L) x 84mm (W) x 55mm (H)
Weight	300g

**Table1**

**(Americas (FCC)):**

2.412 to 2.462 GHz; 11 channels  
 5.180 to 5.320 GHz; 8 channels  
 5.500 to 5.700 GHz, 8 channels (excludes 5.600 to 5.640 GHz)  
 5.745 to 5.825 GHz; 5 channels

**(China):**

2.412 to 2.472 GHz; 13 channels  
 5.745 to 5.825 GHz; 5 channels

**(ETSI):**

2.412 to 2.472 GHz; 13 channels  
 5.180 to 5.320 GHz; 8 channels  
 5.500 to 5.700 GHz, 11 channels

**(Israel):**

2.412 to 2.472 GHz, 13 channels  
 5.180 to 5.320 GHz; 8 channels

**(Korea):**

2.412 to 2.472 GHz; 13 channels  
 5.180 to 5.320 GHz; 8 channels  
 5.500 to 5.620 GHz, 7 channels  
 5.745 to 5.805 GHz, 4 channels

**(Japan2):**

2.412 to 2.472 GHz; 13 channels  
 5.180 to 5.320 GHz; 8 channels

**(Singapore):**

2.412 to 2.472 GHz; 13 channels  
 5.180 to 5.320 GHz; 8 channels  
 5.745 to 5.825 GHz; 5 channels

**(Taiwan):**

2.412 to 2.462 GHz; 11 channels  
 5.280 to 5.320 GHz; 3 channels  
 5.500 to 5.700 GHz, 11 channels  
 5.745 to 5.825 GHz; 5 channels

\* Theoretical wireless signal rate based on IEEE standard of 802.11b, g chipset used. Actual throughput may vary. Network conditions and environmental factors lower actual throughput rate.

\*\* All specifications are subject to change without notice.

7/22/2009

EnGenius Networks Singapore Pte Ltd

215 Henderson Road #01-04 Henderson Industrial Park Singapore 159554

Tel: +65-62271088 Fax: +65-62272766

Website: [www.engeniustech.com.sg](http://www.engeniustech.com.sg) Email: [inquiry@engeniustech.com.sg](mailto:inquiry@engeniustech.com.sg)




# EOC-5610

Wireless 802.11 a/b/g Outdoor AP


2.4 GHz / 5 GHz	54Mbps	802.11 a/b/g	24V PoE
-----------------	--------	--------------	---------

## Application

### Access Point Mode

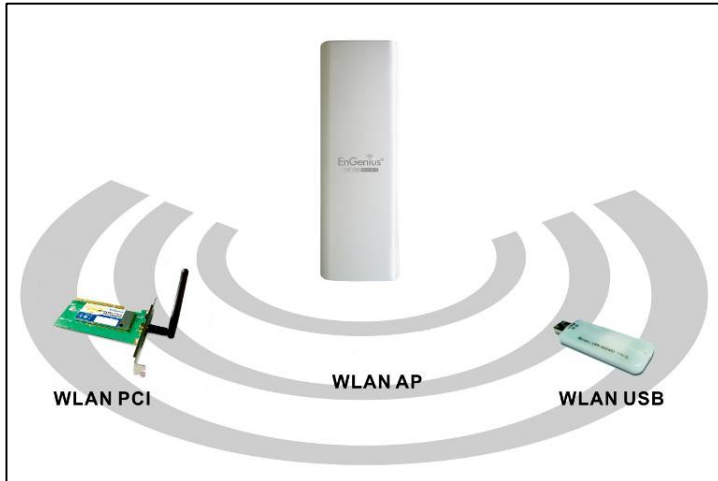

### Client Bridge Mode

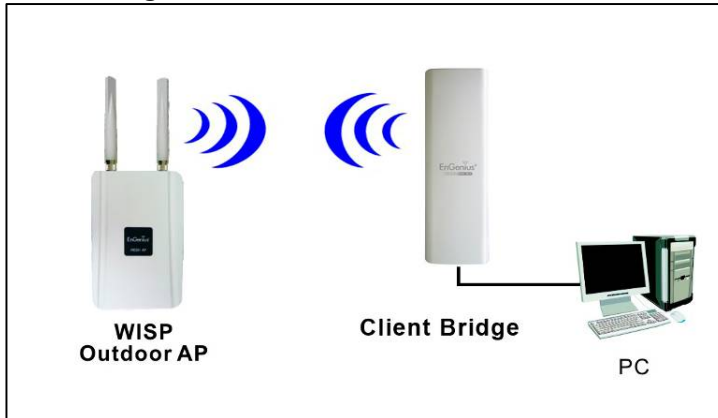

\* Theoretical wireless signal rate based on IEEE standard of 802.11b, g chipset used. Actual throughput may vary. Network conditions and environmental factors lower actual throughput rate.

\*\* All specifications are subject to change without notice.

7/22/2009




# EOC-5610

Wireless 802.11 a/b/g Outdoor AP

2.4 GHz / 5 GHz	54Mbps	802.11 a/b/g	24V PoE
-----------------	--------	--------------	---------

## Client Router

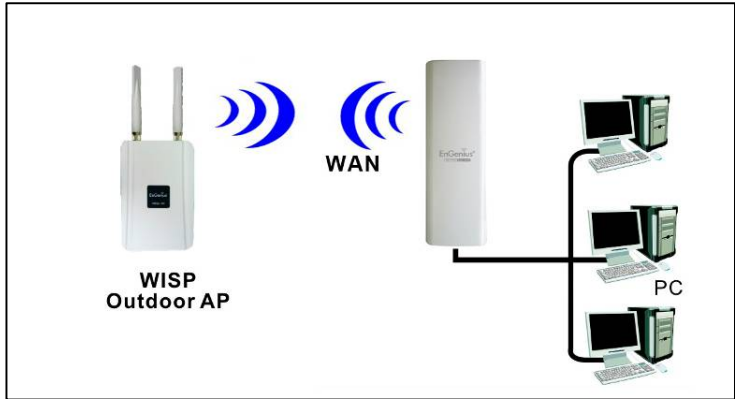

## Product ID & Mounting Base



\* Theoretical wireless signal rate based on IEEE standard of 802.11b, g chipset used. Actual throughput may vary. Network conditions and environmental factors lower actual throughput rate.

\*\* All specifications are subject to change without notice.

7/22/2009

EnGenius Networks Singapore Pte Ltd  
 215 Henderson Road #01-04 Henderson Industrial Park Singapore 159554  
 Tel: +65-62271088 Fax: +65-62272766  
 Website: [www.engeniustech.com.sg](http://www.engeniustech.com.sg) Email: [inquiry@engeniustech.com.sg](mailto:inquiry@engeniustech.com.sg)

