


Quick Start Guide Surge Arrester

● Installation Guide

1. Place the unit in an appropriate place.
2. Plug one end of the Ethernet cable of Surge Arrester into the Wireless Device port of the RJ-45 Injector.
3. Place one end of another Ethernet cable of Surge Arrester into the Internal Network.

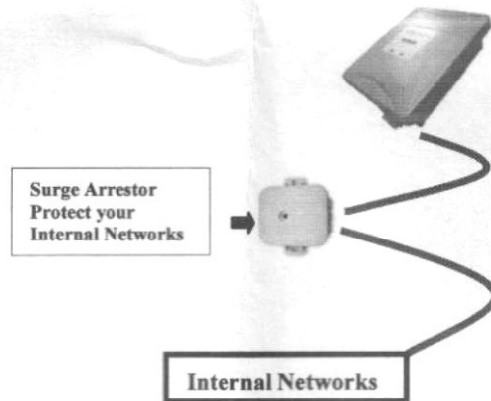

4. Connect a 16Amp minimum earth wire from the large ground screw in the centre under the cover. Connect this to a suitable, external, earth point. It is recommended that you use a proper earthing spike.

● Product Highlight

- 1) DC spark-over voltage : 75V +-25%
- 2) Impulse spark-over voltage : at 100V/us \leq 500V
at 1kV/us \leq 600V
- 3) PCBA components

RJ-45
Surge absorber ES75XPA*10
PCB 2-layer FR-4 50x40x1.6mm
EARTH PARTS INCLUDE SCREW