

















ANTENNAS | PUCK-12 SERIES

2-IN-1 TRANSPORTATION & IOT/M2M ANTENNA

2400 – 7200 MHz; 2X2 Wi-Fi (MIMO), 7.5 dBi



| | | | | | | |
|---|---|---|--|---|---|--|
|  |  |  |  |  |  |  |
| 2400 – 2500 MHz 5000 – 7200 MHz | 7.5 dBi | 2.4 – 2.5 GHz 5.0 – 7.2 GHz | Omni- Directional | IoT | 2X2 MIMO | Urban |
|  |  |  |  |  | |  |
| Machine to Machine | IP69K | -40°C to +80°C | Fire Resistant | Chemical Protection | | Rural/Farm |
| | | | | | |  |
| | | | | | | Marine |
| | | | | | |  |
| | | | | | | Vehicle |
| | | | | | |  |
| | | | | | | Meter |

- 2-in-1 high performance omni-directional antenna
- Dual-band Wi-Fi, 2.4 GHz and 5 GHz frequency bands
- 2X2 MIMO for improved performance
- Robust, vandal resistant and waterproof enclosure (IP69K)
- Ultra-versatile mounting options for easy installation

APPLICATION AREAS

Product Overview

Poynting's new PUCK range offers a small profile antenna which can be used in the IoT/M2M, Smart Meter, Smart Utilities, Transportation, Marine and the Agricultural/Farming markets. The PUCK-12 consists of a 2-in-1 antenna system within a single housing, featuring 2x2 MIMO Wi-Fi (Dual-band 2.4 GHz & 5 GHz). The antenna provides two separate dual-band Wi-Fi antennas offering concurrent 2.4 GHz and 5 GHz bands, capable of 802.11n and 802.11ac/ax with 2x2 MIMO. The PUCK exceeds the performance of many competitors due to the attention to design of this high-performance antenna. The radiation patterns of all radiating elements provide an excellent balance between omnidirectionality, pattern diversity and good radiation abilities at the desired elevation, which is often overlooked in such a small size antenna. Despite its small size, this antenna provides excellent performance especially at the higher frequency bands, where performance is critical for Wi-Fi throughput and connection stability.

Features

- Small & Low-profile (Ø100mm x h 36mm)
- Careful mechanical design provides ruggedness, corrosion, water and dust resistance (IP69K)
- Fire Resistant
- UV Stable Enclosure
- Easy installation; multi-implementation options available:
 - Spigot Mount
 - Magnetic Mount
 - Adhesive Tape Mount
 - Bracket Mount


Application Areas

- Smart utilities: Smart power, Gas & Water Metering
- Smart Buildings: Climate control, access control, security, irrigation
- Industrial factory automation, robotic machinery and other M2M systems
- Digital Signage
- Warehouses & Logistic systems
- Transport (Busses, Utility & Public Safety)
- Mining Vehicles & Machinery communications, telemetry and automation (M2M & IoT)
- Agricultural machinery
- Marine: small boats, yachts near to coastlines or inner waters



Frequency Bands

The PUCK-12 is an omni-directional antenna that works from | 2400 – 2500 MHz | and | 5000 – 7200 MHz |

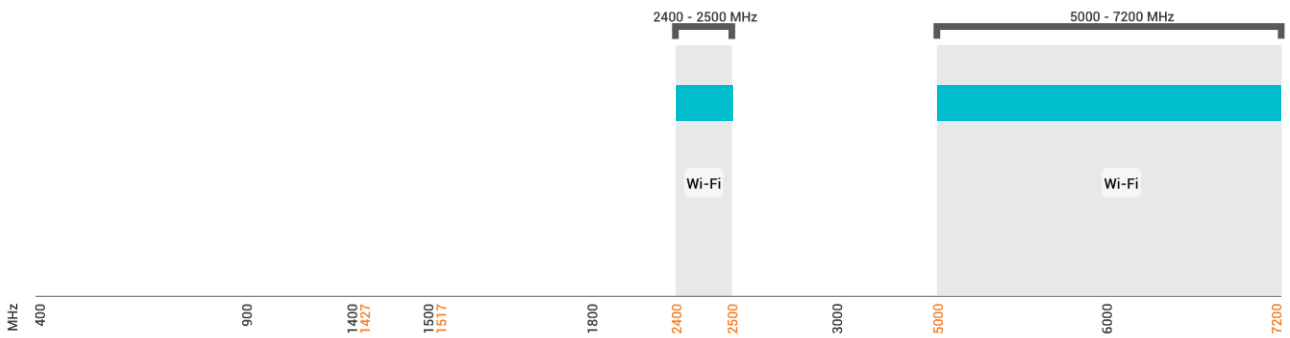

Indicates the WI-FI bands on which PUCK-12 works

Antenna Derivatives

| Product Order Code (SKU) | PUCK-12-V1-01 | PUCK-12-V1-01-W |
|--------------------------|--------------------------------------|--------------------------------------|
| Radome Colour | Black | White |
| Radome Material | PC+ABS (Halogen free) | UV Stable ASA |
| Ports | 2 | 2 |
| SISO/MIMO | MIMO | MIMO |
| Coax Cable Type | RTK-031 | RTK-031 |
| Coax Cable Length | 2m | 2m |
| Connector Type | SMA (M) (RP-SMA adapter included) | SMA (M) (RP-SMA adapter included) |
| EAN | 6009880915248 | 6009710924679 |
| EU Homologation Number | E1*10R06/01*9551*00 | E1*10R06/01*9551*00 |

*The coax cable & connector are factory mounted to the antenna

Electrical Specifications

| | |
|------------------------|--|
| Frequency Bands: | 2400 – 2500 MHz 5000 – 7200 MHz |
| Gain (Max) Port 1 & 2: | 5 dBi @ 2400-2500 MHz 7.5 dBi @ 5000-7200 MHz |
| VSWR Port 1 & 2: | ≤2.5:1 Across 95% of the bands |
| Feed Power Handling: | 10 W |
| Input Impedance: | 50 Ohm (nominal) |
| Polarisation: | Linear Vertical |
| Coax Cable Loss: | 0.91 dB/m @ 2400 MHz 1.65 dB/m @ 5800 MHz |
| DC Short: | Yes |

Product Box Contents

| | |
|-------------------|--|
| Antenna: | A-PUCK-0012-V1-01 |
| Mounting Bracket: | Ø20 Threaded Spigots (Up to 60mm clamping thickness), Adhesive Surface Mounting & Magnetic Mount |
| Adapters: | 2x RP-SMA(M) To SMA (F) |

Mechanical Specifications

| | |
|----------------------|---|
| Product Dimensions | Ø99.3 mm x 36 mm |
| Packaged Dimensions: | 150 mm x 150mm x 120mm |
| Weight: | 0.376kg |
| Packaged Weight: | 0.507kg |
| Mounting Type: | Ø20 Threaded Spigot, Pole, Wall, Surface and Magnetic mount |


Environmental Specifications, Certification & Approvals

| | |
|--|-------------------------------------|
| Wind Survival: | <220 km/h |
| Temperature Range (Operating): | -40°C to +80°C |
| Environmental Conditions: | Outdoor/Indoor |
| Water Ingress Protection Ratio/Standard: | IP69K |
| Salt Spray: | MIL-STD 810G/ASTM B117 |
| Operating Relative Humidity: | Up to 98% |
| Storage Humidity: | 5% to 95% - non-condensing |
| Storage Temperature: | -40°C to +80°C |
| Enclosure Flammability Rating: | UL 94-HB |
| Impact Resistance: | IK 10 |
| Product Safety & Environmental: | Complies with CE and RoHS standards |




Antenna Performance Plots

VSWR: Wi-Fi Antenna

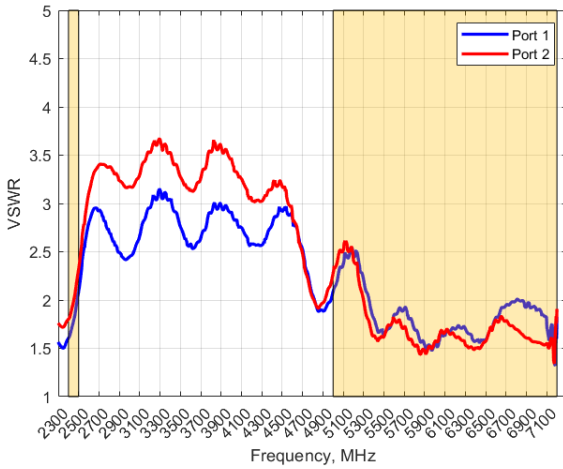

GAIN (Excluding Cable Loss): Wi-Fi Antenna

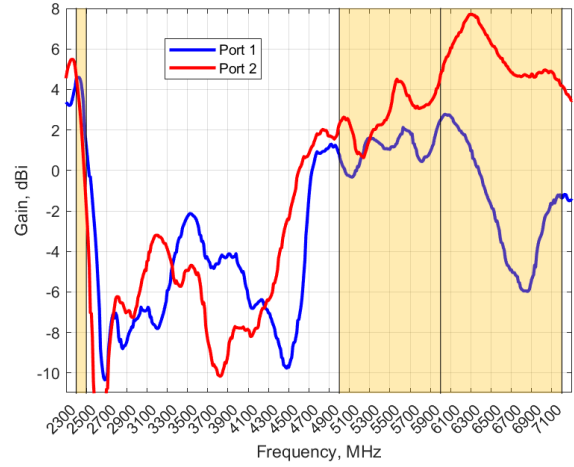

Voltage Standing Wave Ratio (VSWR)*

VSWR is a measure of how efficiently radio-frequency power is transmitted from a power source, through a transmission line, into a load. In an ideal system, 100% of the energy is transmitted which corresponds to a VSWR of 1:1.

The PUCK-12 delivers superior performance across all bands with a VSWR of $\leq 2:1$ across 90% of the bands.

**Measured with 2m low loss cable, 650 x 650 mm ground plane, and unused ports terminated with 50Ω load.*

Gain* in dBi


7.5 dBi is the peak gain across all bands from 2400 – 2500 MHz & 5000 – 7200 MHz

Gain @ 2400 – 2500 MHz: 5 dBi

Gain @ 5000 – 7200 MHz: 7.5 dBi


**Antenna gain measured with polarisation aligned standard antenna*

Technical Drawings

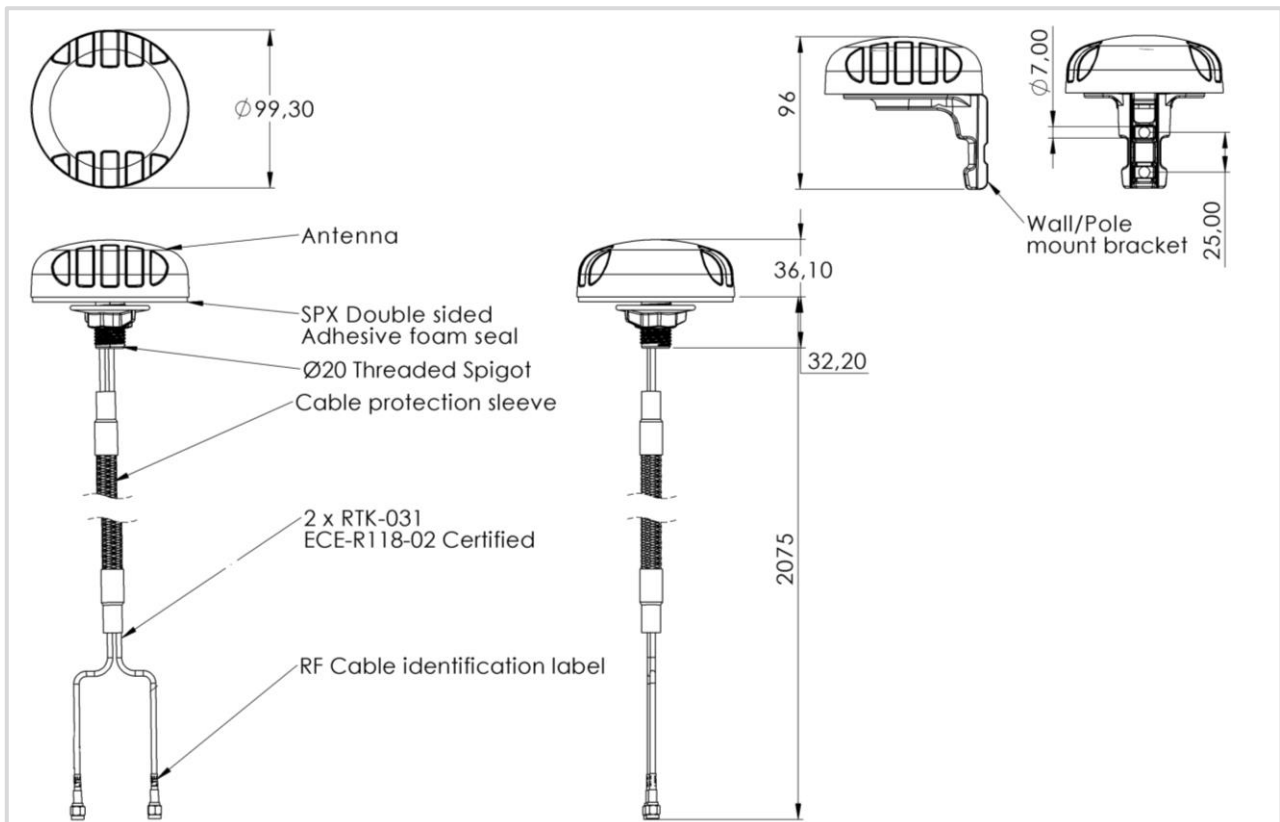


Radiation Patterns


Azimuth: 2400 – 2500 MHz

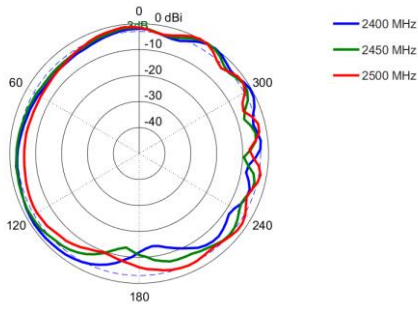


Azimuth: 5000 – 5400 MHz

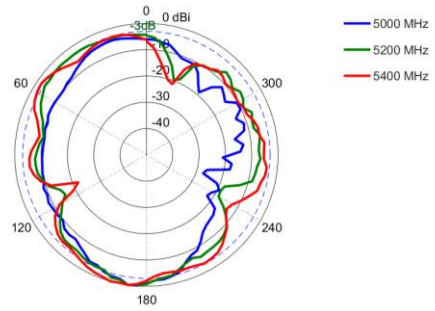


Azimuth: 5600 – 5800 MHz

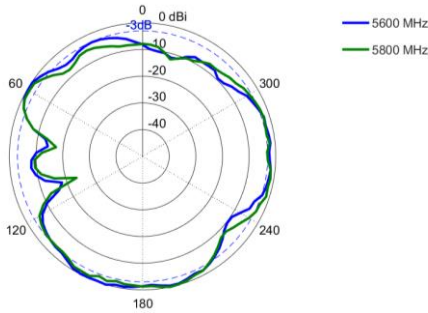


Azimuth: 6300 – 7200 MHz

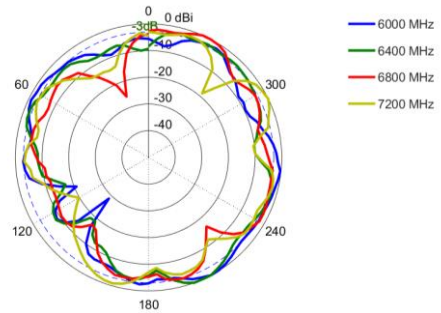


Elevation 1: 2400 – 2500 MHz

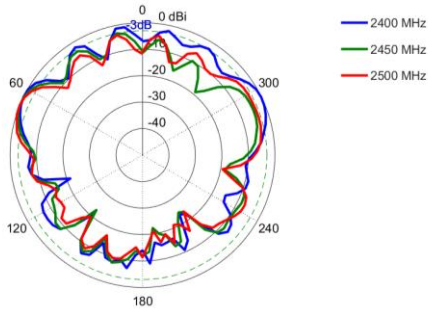


Elevation 1: 5000 – 5400 MHz

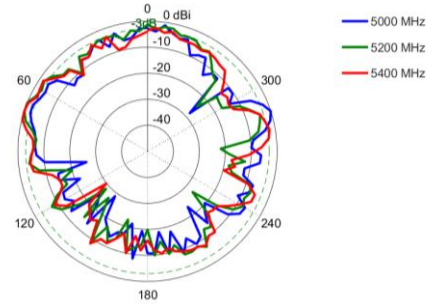


Elevation 1: 5600 – 5800 MHz

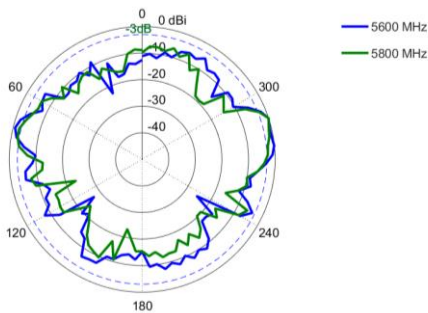


Elevation 1: 6000 – 7200 MHz

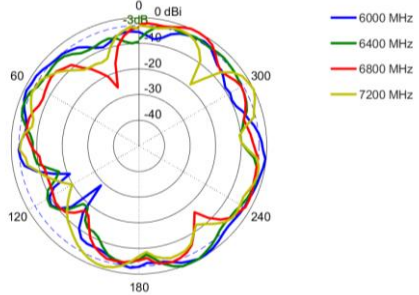


Elevation 2: 2400 – 2500 MHz

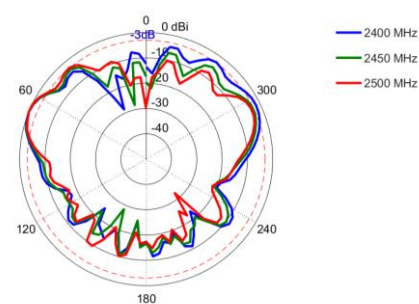


Elevation 2: 5000 – 5400 MHz

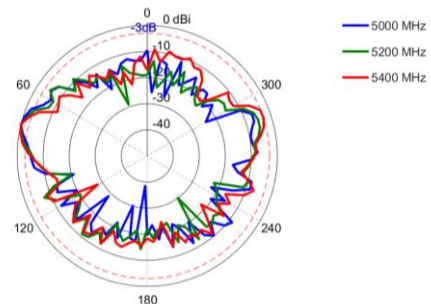

Elevation 2: 5600 – 5800 MHz

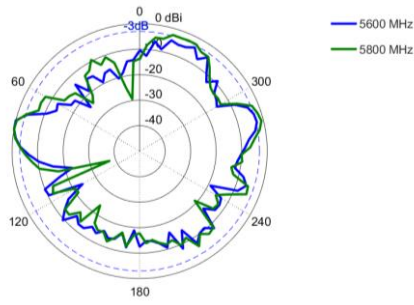

Elevation 2: 6000 – 7200 MHz

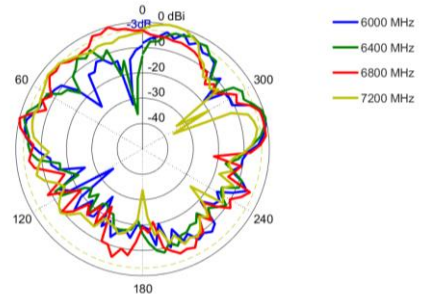


Mounting Options

Many Mounting Possibilities – included as standard


Poynting's new PUCK antenna range provides easy installation with the multiple mounting options. This includes as standard:

- Spigot Mount - two different lengths included (40mm & 80mm)
- Vertical Pole mount (inner & outer mounting for smaller and larger poles)
- Horizontal Pole Mount (e.g., marine rails)
- Magnetic Mount
- Surface Mount (Double Sided Tape)
- Wall Mount

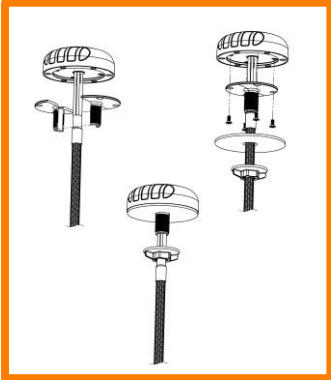


Spigot Mount

Removable 40mm & 80mm threaded spigot (included)

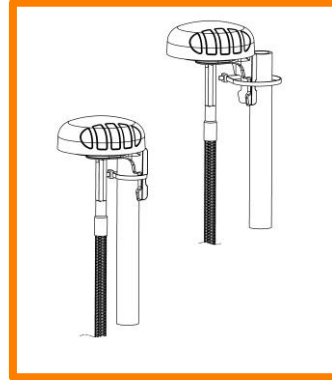


Vertical Pole Mount

Pole/Wall Mounting bracket (included)

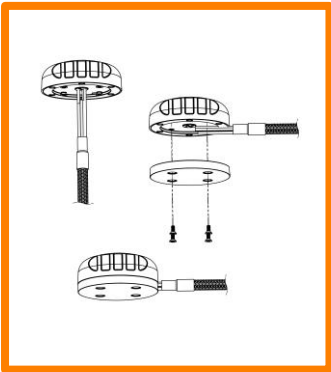


Magnetic Mount

Magnetic Base (included)
For temporary and low mobility installations.

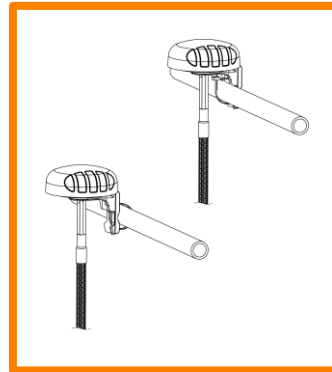


Horizontal Pole Mount

Pole/Wall Mounting bracket (included)



Surface Mount

Adhesive Surface Mounting (included) or can also be directly secured with longer M4 bolts (not included) to the female threaded inserts located in the antenna base




Wall Mount

Pole/Wall Mounting bracket (included)

Additional Accessories

See accessories technical specifications on www.poynting.tech



CONTACT POYNTING

Poynting Antennas (Pty) Ltd - Head Office

Unit 4, N1 Industrial Park,
Landmarks Avenue,
Samrand, 0157, South Africa

Phone: +27 (0) 12 657 0050

E-mail: info@poynting.tech

International Email: sales-global@poynting.tech

Poynting Europe

Regus Business Center Neue Messe Riem
Kronstadter Straße 4
81677 München
Germany

Phone: +49 89 7453 9002

E-mail: sales-europe@poynting.tech

Poynting USA

1804 Owen Court, Suite 104,
Mansfield,
TX 76063
USA

Phone: +1 817 533-8130

E-mail: sales-us@poynting.tech