

Category 6 PVC, LSZH & External UTP Cable



Matrix Cat6 UTP Cable exceeds all the requirements of:

- ANSI/TIA/EIA-568-B.2-1 Category 6
- ISO/IEC 11801 Category 6
- PVC & LSZH are compliant to EuroClass ECA of the CPR Regulations


Available with:

- Violet LSZH sheath
- Grey PVC sheath
- External Black double sheath - 500metre reel

Features:

- Reverse sequential metre marking
- 305m Snag-free “reel in a box” cable dispenser
- 23 AWG solid copper conductors

Description	Part Number
Cat 6 LSZH	MATRIX-C6-UTP-VI-L-SO
Cat 6 PVC	MATRIX-C6-UTP-GY-P-SO
Cat 6 External	MATRIX-C6-UTP-BK-SO-500REEL

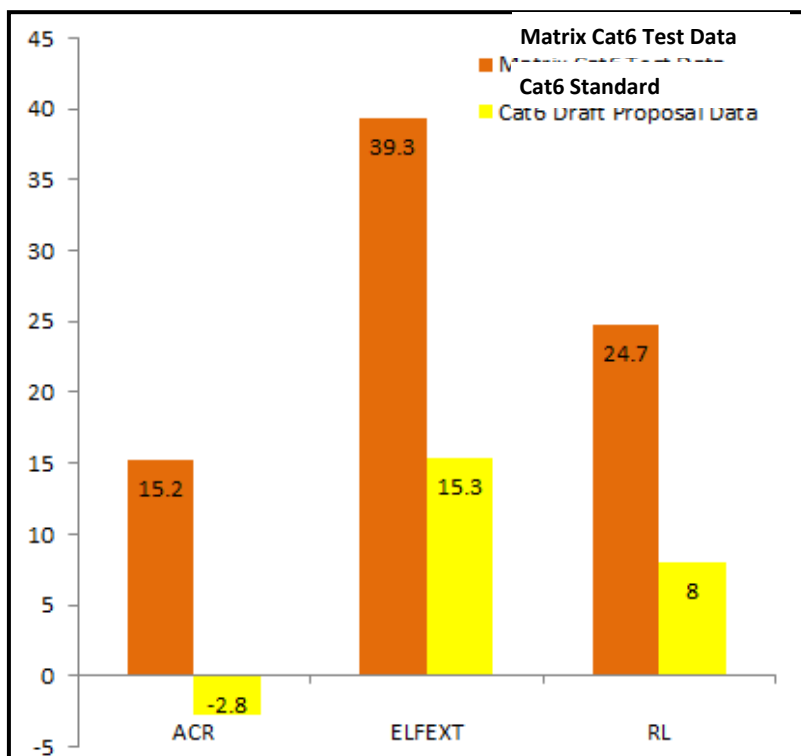

This document subject to change without notice.

Category 6 PVC, LSZH & External UTP Cable

Specifications

Mechanical Characteristics

- Insulation Type : HDPE
- Outer Sheath : LSZH or PVC
- Operating temperature $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$

Cable	Conductor \varnothing	Insulation \varnothing	Overall \varnothing
Cat6 PVC	0.545 mm	0.25 mm	5.80mm
Cat6 LSZH	0.565 mm	0.25 mm	5.90mm
Cat6 External	0.545 mm	0.25 mm	6.20mm



Electrical Performance


- Conductor Resistance : $93.8\Omega/\text{km}$ @ 20°C Max.
- Mutual Capacitance : $5.6 \text{ nF}/100\text{m}$ Max.
- Resistance Unbalance : 5% Max.
- Capacitance Unbalance : $330 \text{ pF}/100\text{m}$ Max.
- Impedance : $F \leq 200:100 \pm 15\Omega$, $F > 200:100 \pm 22\Omega$
- Nominal Velocity of Propagation (NVP) : 69%

Colour Codes

- Pair 1: Blue + White/Blue
- Pair 2: Orange + White/Orange
- Pair 3: Green + White/Green
- Pair 4: Brown + White/Brown

Application - High Speed Horizontal Cabling

- 100MBps TPDDI
- 1000 Base T
- 622Mbps ATM
- IEEE802.3/IEEE802.5
- Digital Video



Frequency (Mhz)	Return Loss (dB)	Attenuation (dB/100m)	NEXT (dB)	ACR (dB)	PSNEXT (dB)	ELFEXT (dB/100m)	PSELFEXT (dB/100m)	Delay (ns/100m)
0.772	19.4	1.8	76.0	74.2	74.0	70.0	67.0	575.0
1	20.0	2.0	74.3	72.3	72.3	67.8	64.8	570.0
4	23.0	3.8	65.3	61.5	63.3	55.7	52.7	552.0
8	24.5	5.3	60.8	55.4	58.8	49.7	46.7	546.7
10	25.0	6.0	59.3	53.3	57.3	47.8	44.8	545.4
16	25.0	7.7	56.3	48.6	54.3	43.7	40.7	543.0
20	25.0	8.6	54.8	46.2	52.8	41.7	38.7	542.0
25	24.3	9.6	53.3	43.7	51.3	39.8	36.8	541.2
31.25	23.6	10.8	51.9	41.1	49.9	37.9	34.9	540.4
62.5	21.5	15.7	47.4	31.7	45.4	31.8	28.8	538.6
100	20.1	20.2	44.3	24.1	42.3	27.8	24.8	537.6
200	18.0	29.8	39.8	10.0	37.8	21.7	18.7	536.5
250	17.3	33.8	38.3	4.6	36.3	19.8	16.8	536.3

This document subject to change without notice.