ESR6650 3G Wireless Router
Quick Start Guide

Please contact your local ISP for Internet access account detail including Username (or account) and Password. You may need to keep the information handy during the setup process.

Connect the supplied power-adapter to the power inlet port and connect it to a wall outlet. Then, the router automatically enters the self-test phase. During self-test phase, Power LED will blink briefly, and then will be lit continuously to indicate that this product is in normal operation.

Minimum Requirements

- A standard CD-ROM drive
- 3G data card , ADSL or cable modem should be ready for Internet connection.
- Modem must provide RJ45 port to connect with ESR6650.
- Microsoft Windows compatible PC/Notebook with UPnP enabled network adapter
- CAT 5 network cable(s), RJ45 port on PC/Notebook.

STEP 1
Power up the **device**.
Wait for POWER led on front panel lights up & remains stable.

STEP 2
Insert **Wizard CD** into your CD-ROM drive and browse it with Windows Explorer.
Click on "**Wizard.exe**" to activate SMART WIZARD.

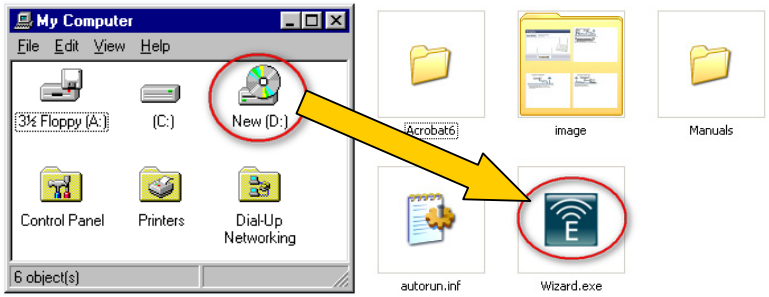

STEP 3

Click on [**Setup Wizard**] and follow the instruction given on the screen to complete the initial device configuration.

Please note that your 3G data card may take more than 20 seconds to initiate and respond to ESR6650. Please be patient and pay attention to the 3G LED on the top panel. Green Light on 3G LED signifies that your 3G card is ready.

Step 4

Click Next to Proceed with the wizard on the connection of the router.

Step 5

Click ‘Next” to start connection

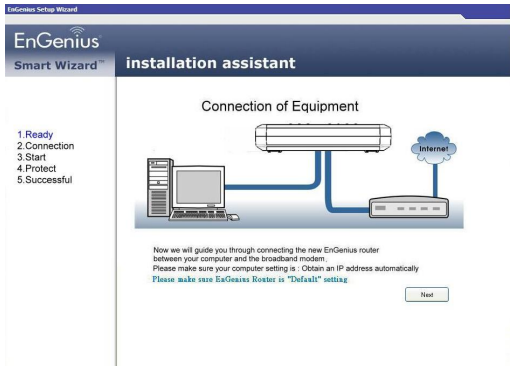

Step 6

Click “ Next’ to proceed to next step

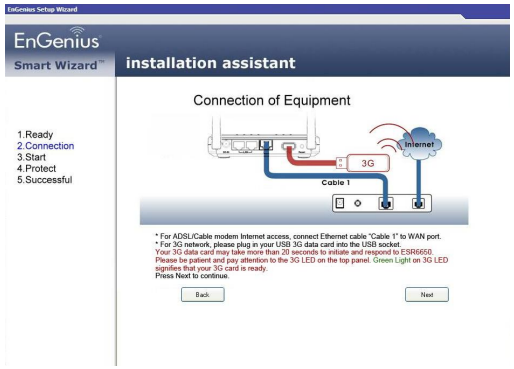

Step 7

Click ‘Next’ to proceed

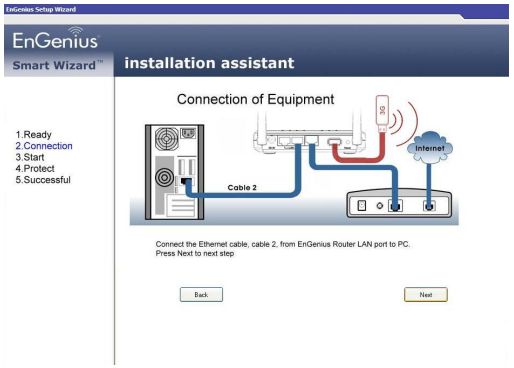

Step 8

Click ‘Next’ to proceed

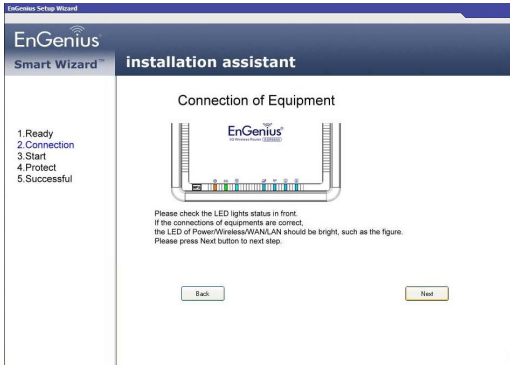

Step 9

Click ‘Next’ to proceed

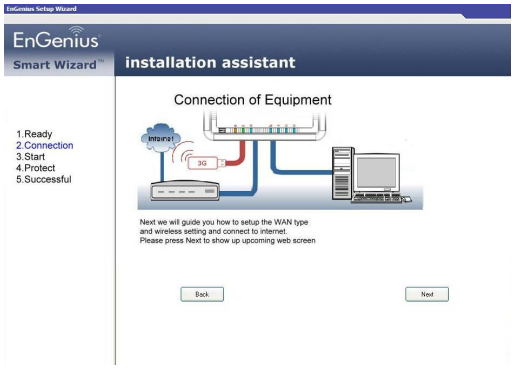

Step 10

Enter User Name and password ‘admin’

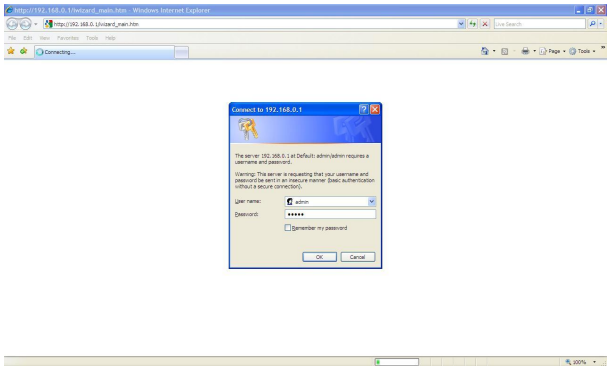

Step 11

Click ‘Next’ to proceed the 3G installation

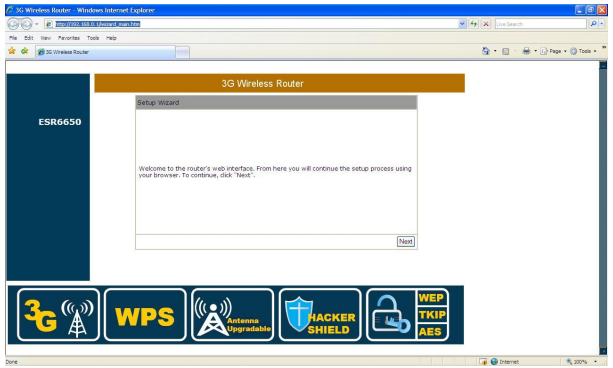

Step 12

Select ‘AP Router Mode’ and click ‘Next’

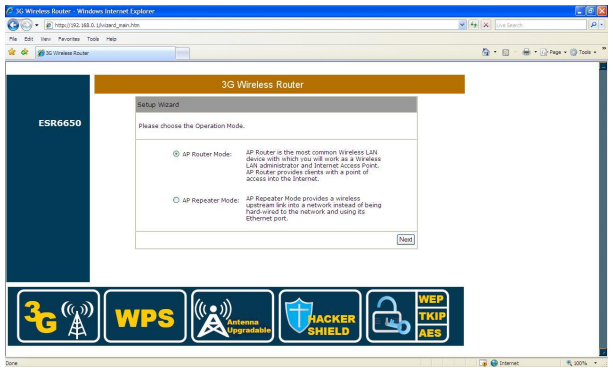

Step 13

Select ‘3G’ and click ‘Next’

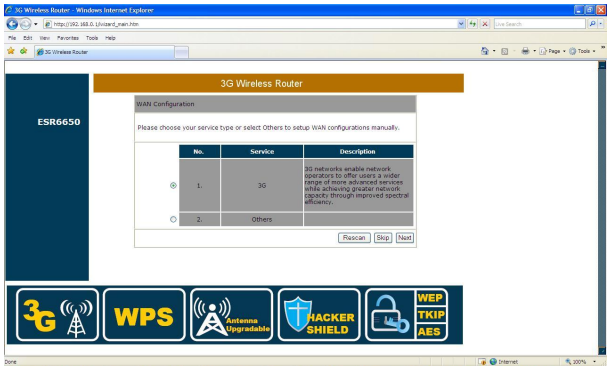

Step 14a

For M1 users input APN Code: **Sunsurf** and Dial Number: ***99#**

Step 14b

For Singnet Users input APN Code: **Internet** and Dial Number: ***99#**

Step 14c

For Starhub Users input APN Code: **Shwap** and Dial Number ***99#**

Step 15

Enter Desired SSID to be broadcast, this will be the WiFi name for the user to connect to the router wirelessly. Click ‘Next’ after this step have been done to proceed.

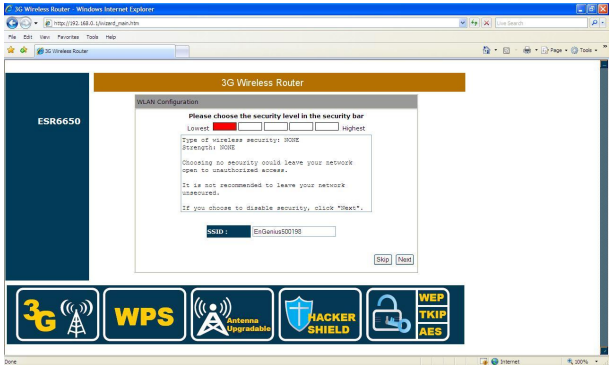

Step 16

Click ‘Reboot’ for the router to initialize the configuration.

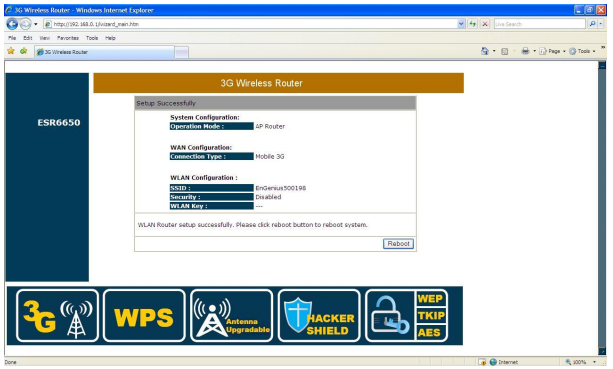

Step 17

Check 3G connection status

Once unit reboots, click ‘System’ and scroll to check 3G connection status.

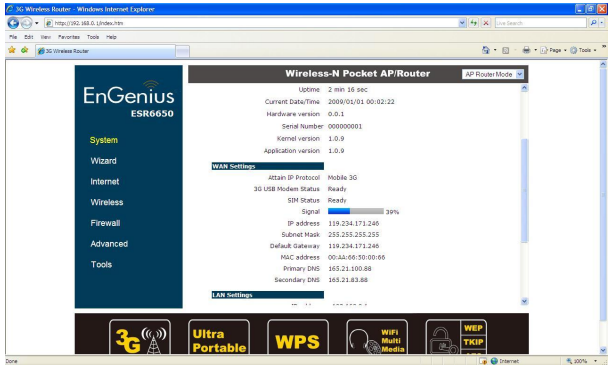

Step 18

Setup WiFi Security

Click on ‘Wireless’ to check/amend SSID to desired. Next Click on ‘Security’ to define WiFi encryption.

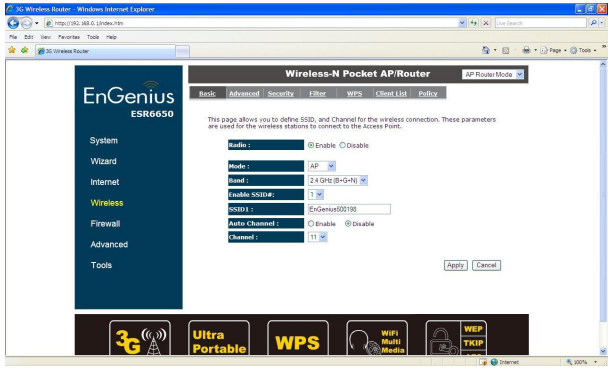

Step 19

Click on ‘Encryption’ to select desired type of encryption for the router WiFi

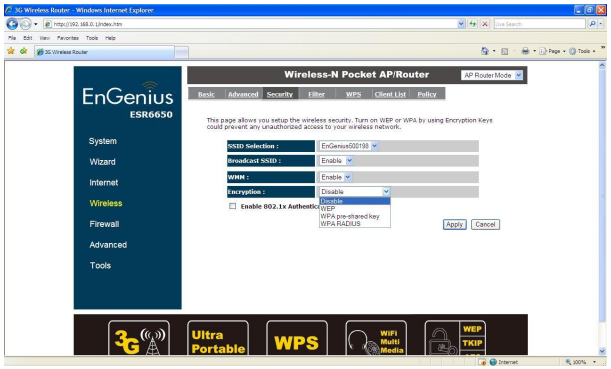

Note:

If Pin Code is required, click on ‘Internet’

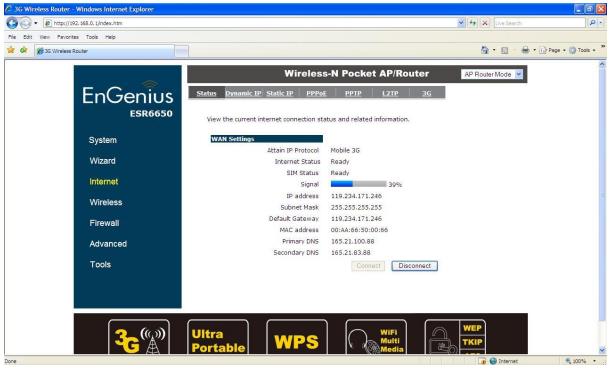
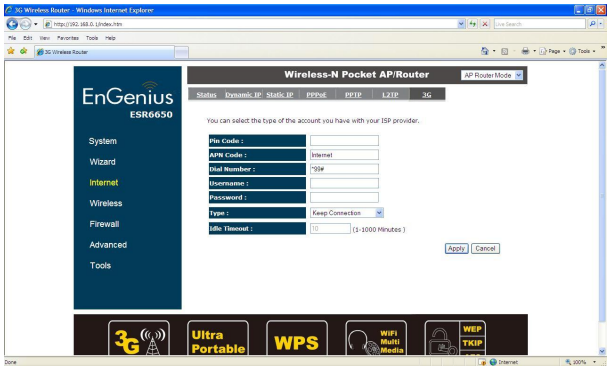
Click on ‘3G’ and input Pin Code and Click ‘**Apply**’ unit will re-initialize and load settings.