


PL-500AV-PEVW Wireless Network Name and Password Setup Guide

Upon logging into the device as suggested in the provided 'Quick Start Guide' document you will be presented with the homepage:

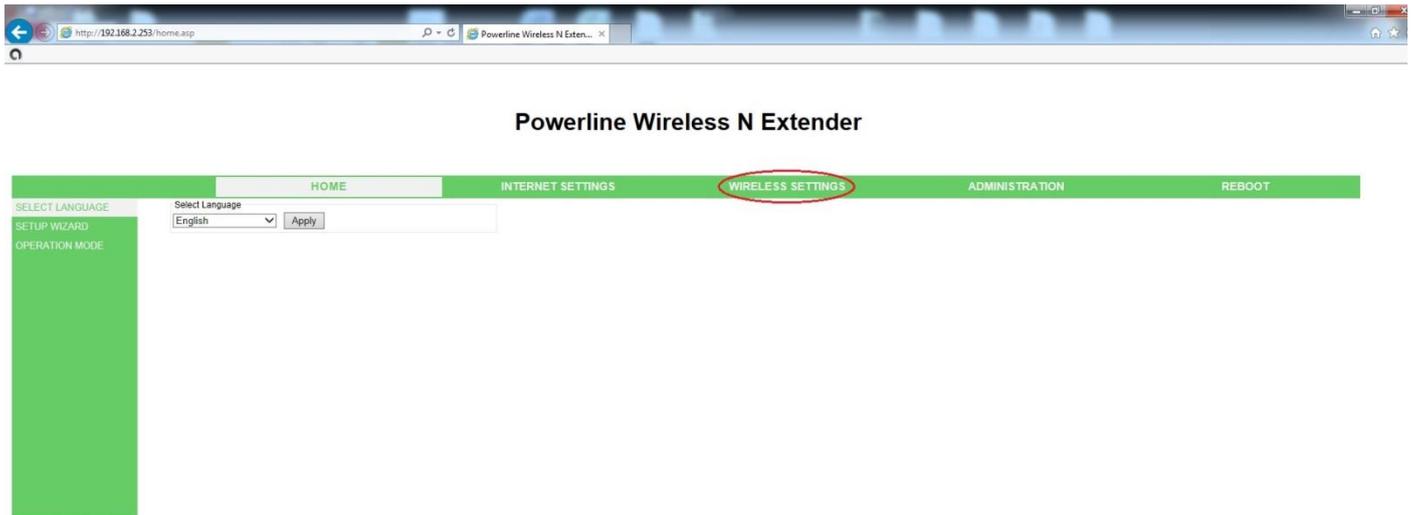

Next we want to navigate to and click on: **'WIRELESS SETTINGS'** from the menu header at the top of the page.

This will take you to the **'Basic Wireless Settings'** page where you can make the necessary changes to the Wi-Fi HomePlug's wireless broadcast name.

It is worth noting that it is not a good idea to try and name all of the Wi-Fi HomePlugs in your premises with the same broadcast name as they will not form a singular network!


That is otherwise known as 'roaming' where client devices can automatically 'hop' to the strongest Wi-Fi signal, this device unfortunately does not support that technology as it is generally found in high-end, large-scale, business products.

So we'd suggest giving them meaningful aliases such as "Master Bedroom", "Office", etc...

You can however keep the password the same for all the units for convenience.


From the 'Basic Wireless Settings' page we want to change the 'Network Name(SSID)' under the 'Wireless Network' header to something more meaningful than the default stock SSID.

I have opted to use 'Living Room' in this example.

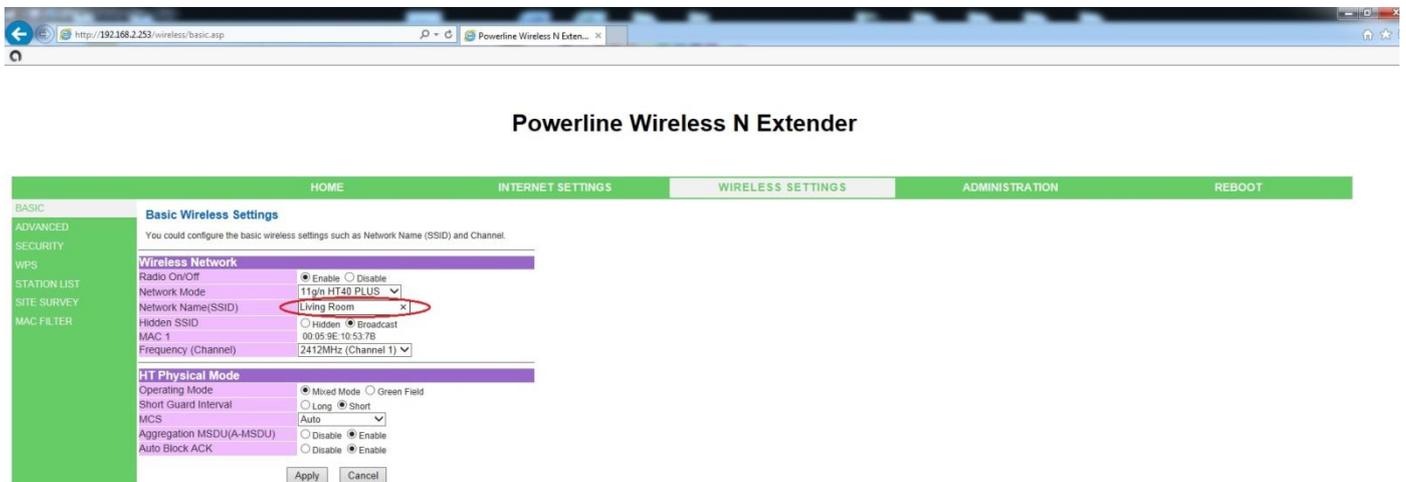

Simply click the 'Apply' button and wait for the changes to take place.

You will eventually be taken back to the original landing page and will need to navigate to 'Wireless Settings' and then 'Security' from the menu on the left-hand side.

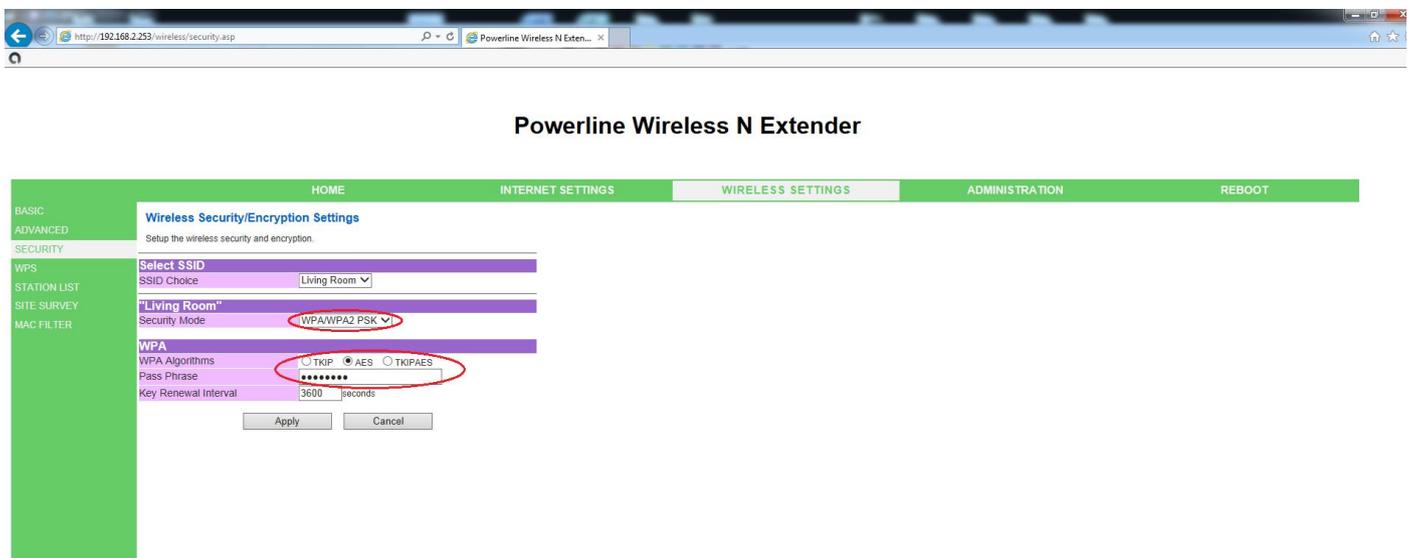

Change the 'Security Mode' to 'WPA/WPA2 PSK', ensure the 'WPA Algorithm' is set to 'AES', and enter your 'Pass Phrase' of choice (at least eight characters long) then finally click 'Apply'.

Your PL-500AV-PEVW will now be set up with a sensible broadcast SSID and password!